


内部結構圖-内嵌式四列滾珠滑台


Inner structure Built-in Guideway Ball Screw Actuator

四列滾珠設計 Four-row ball design

高剛性 高精度 低摩擦 高速運動 荷載能力大 長壽命。
High rigidity, high precision, low friction, high-speed motion, large load capacity and long life.



四列滾珠設計
Four-row ball design




精度提高 Accuracy Improved

- ① 無間隙可輕快運動且運動到“圓弧溝槽”
No gap can move briskly and move to the "circular groove"
- ② “圓弧溝槽”易于高精度給進長期保持精度。
The "circular groove" is easy to maintain accuracy for a long time with high precision.
- ③ 可在內滑塊，四個方向實現相同的額定載荷，任何方向都可以使用。
The same rated load can be achieved in four directions of the internal slider, which can be used in any direction


四方位受力

Force in four directions



高度變低 Height reduction

具有低重心的物體或結構更加穩定，更不容易傾倒或失去平衡。
Objects or structures with a low center of gravity are more stable and less likely to tip over or lose balance.

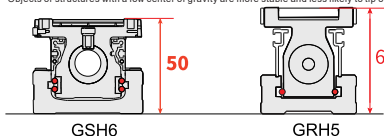


GSH6

GRH5

組裝省時、方便 Easy to assemble

- ① 不需拆卸鋼帶，即可由上往下固定或由下往上固定。
Can be fixed from the top and bottom without removing the cover.
- ② 本體側面增加安裝基準面承靠。
Mounting datum plane designed on the side of the body.
- ③ 本體底部有定位PIN孔。
Built in Pin holes.

*GHS6/8/10需要下鎖安裝請聯系銷售
GHS6/8/10 needs to be installed under the lock, please contact sales

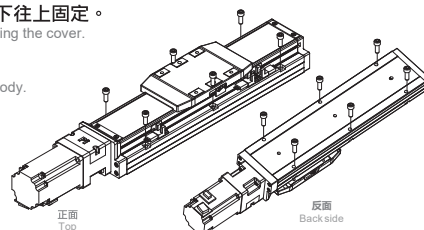

正面
Top


反面
Back side

無塵室專用對應式樣
Clean Room Type

CLASS100

無塵室專用真空源接頭。
Vacuum connector for clean room use.

NEW
新產品

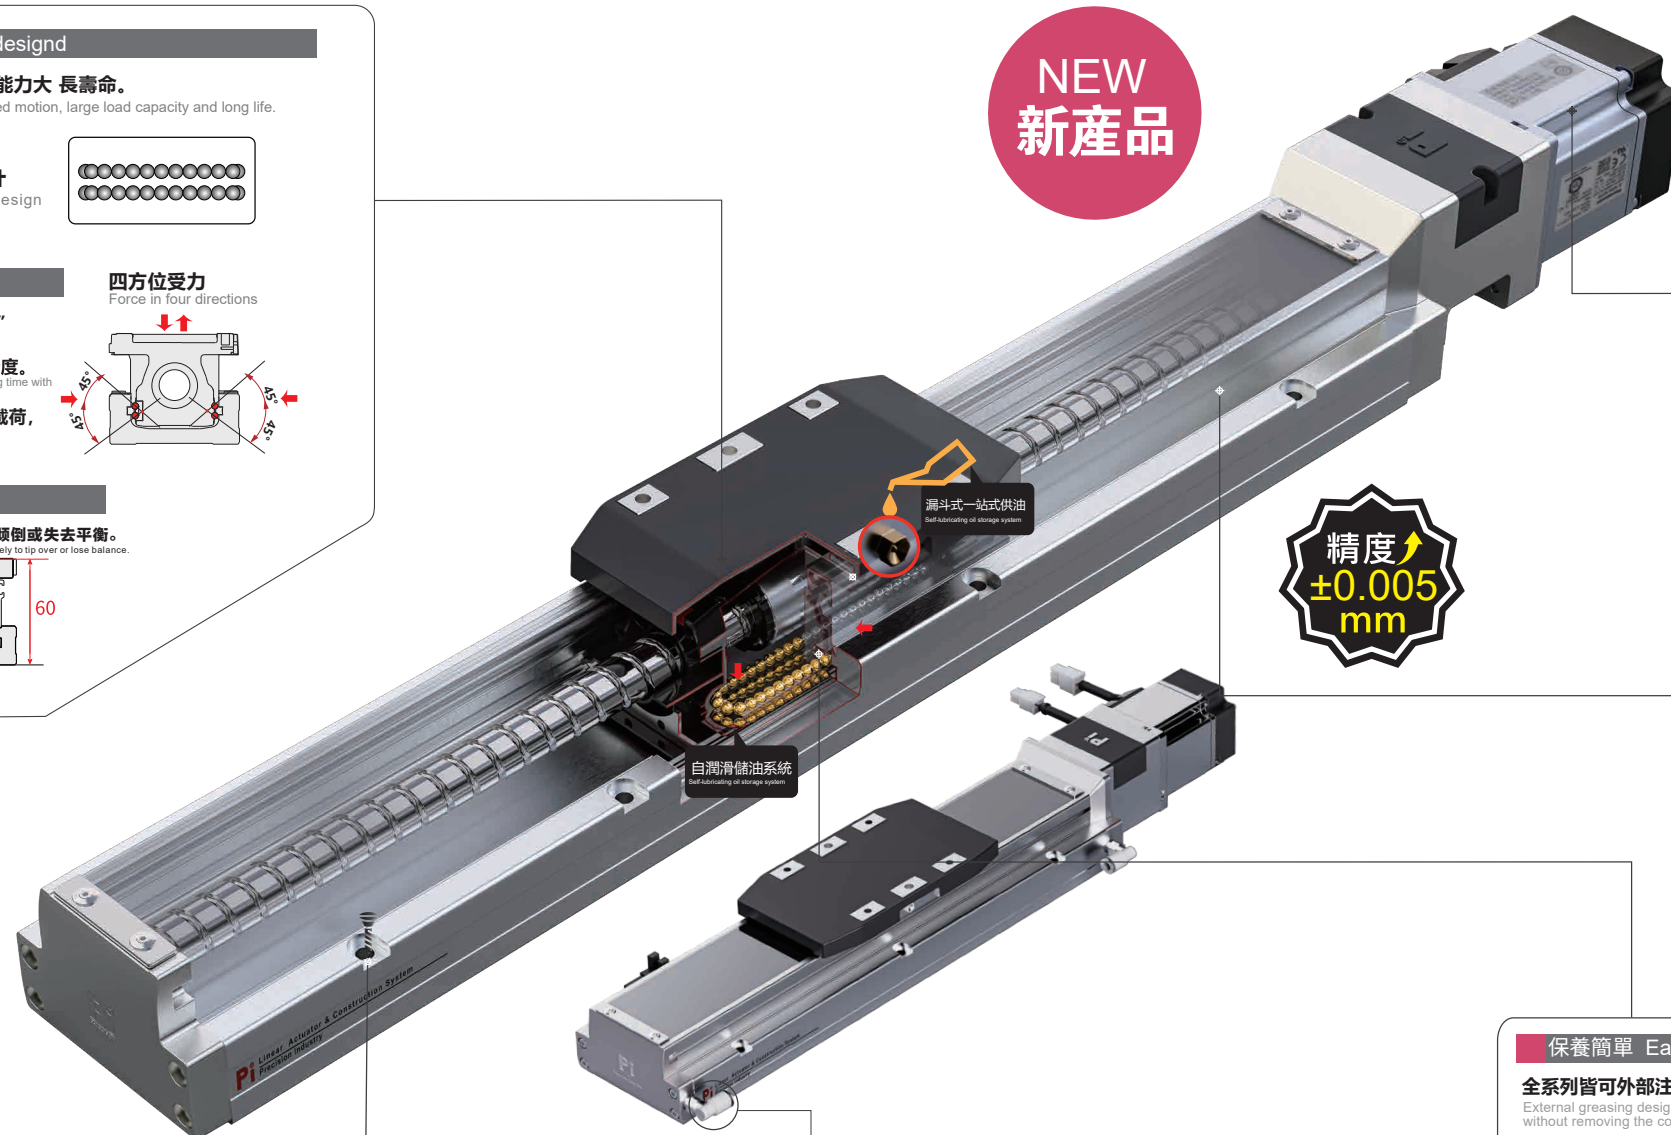

精度
±0.005
mm

漏斗式一站式供油
Self-lubricating oil storage system

自潤滑儲油系統
Self-lubricating oil storage system

馬達廠牌 Motor brand


可搭配各廠牌的伺服馬達。
Compatible with several brands of motors.

馬達廠牌 Standard suitable motor brands			
三菱 Mitsubishi	松下 Panasonic	安川 Yaskawa	台達 Delta

◎其他馬達廠牌規格，請聯絡業務人員。
Please consult with our sales personnel for other motor specifications.

馬達安裝位置 Motor Install options

多方向馬達安裝位置可供選擇，讓機台設計更有彈性。
Multiple motor installation positions provides the flexibility for machine design.



BC馬達外露 BL馬達左折 BR馬達右折 BM馬達下折

BC Motor Exposed BL Motor Left Side BR Motor Right Side BM Motor Bottom Side

鋼帶設計 Cover sheet design

有鋼帶保護，可避免異物直接掉落滑台內部。
With cover sheet protection, it can prevent foreign objects from directly falling into the interior of the sliding carriage.

最大行程 Maximum stroke

最大行程可到1500mm。
Maximum stroke up to 1500mm.

式樣齊全 It is complete in specifications

標準本體染黑，也可選配本體原色
The standard body is dyed black, and the main color is also optional




本體染黑
The body is dyed black


標準(原色)
Standard

保養簡單 Easy to maintain

全系列皆可外部注油，不須拆蓋。
External greasing design, easy maintenance without removing the cover.



自潤滑儲油系統
Self-lubricating oil storage system



自潤滑儲油裝置
Self-lubricating oil storage equipment

不易發塵 Reduce dust

特殊鋼帶結構設計，可減少發塵；可用於潔淨室環境。

Special steel strip cover sealing design can prevent dirt and foreign objects from penetrating inside. Can be used in clean room environment.